


FOOTING ELEVATION SCHEDULE		
T.O.S. 53.20'	TOP FIN.	BOT. FIN.
-0'-0"	53.57	53.57
-1'-4"	51.87	50.87
-2'-4"	51.37	50.37
-3'-4"	50.87	49.87
-4'-4"	49.87	48.87
-5'-4"	48.87	47.87
-6'-4"	47.87	46.87
-7'-4"	46.87	45.87

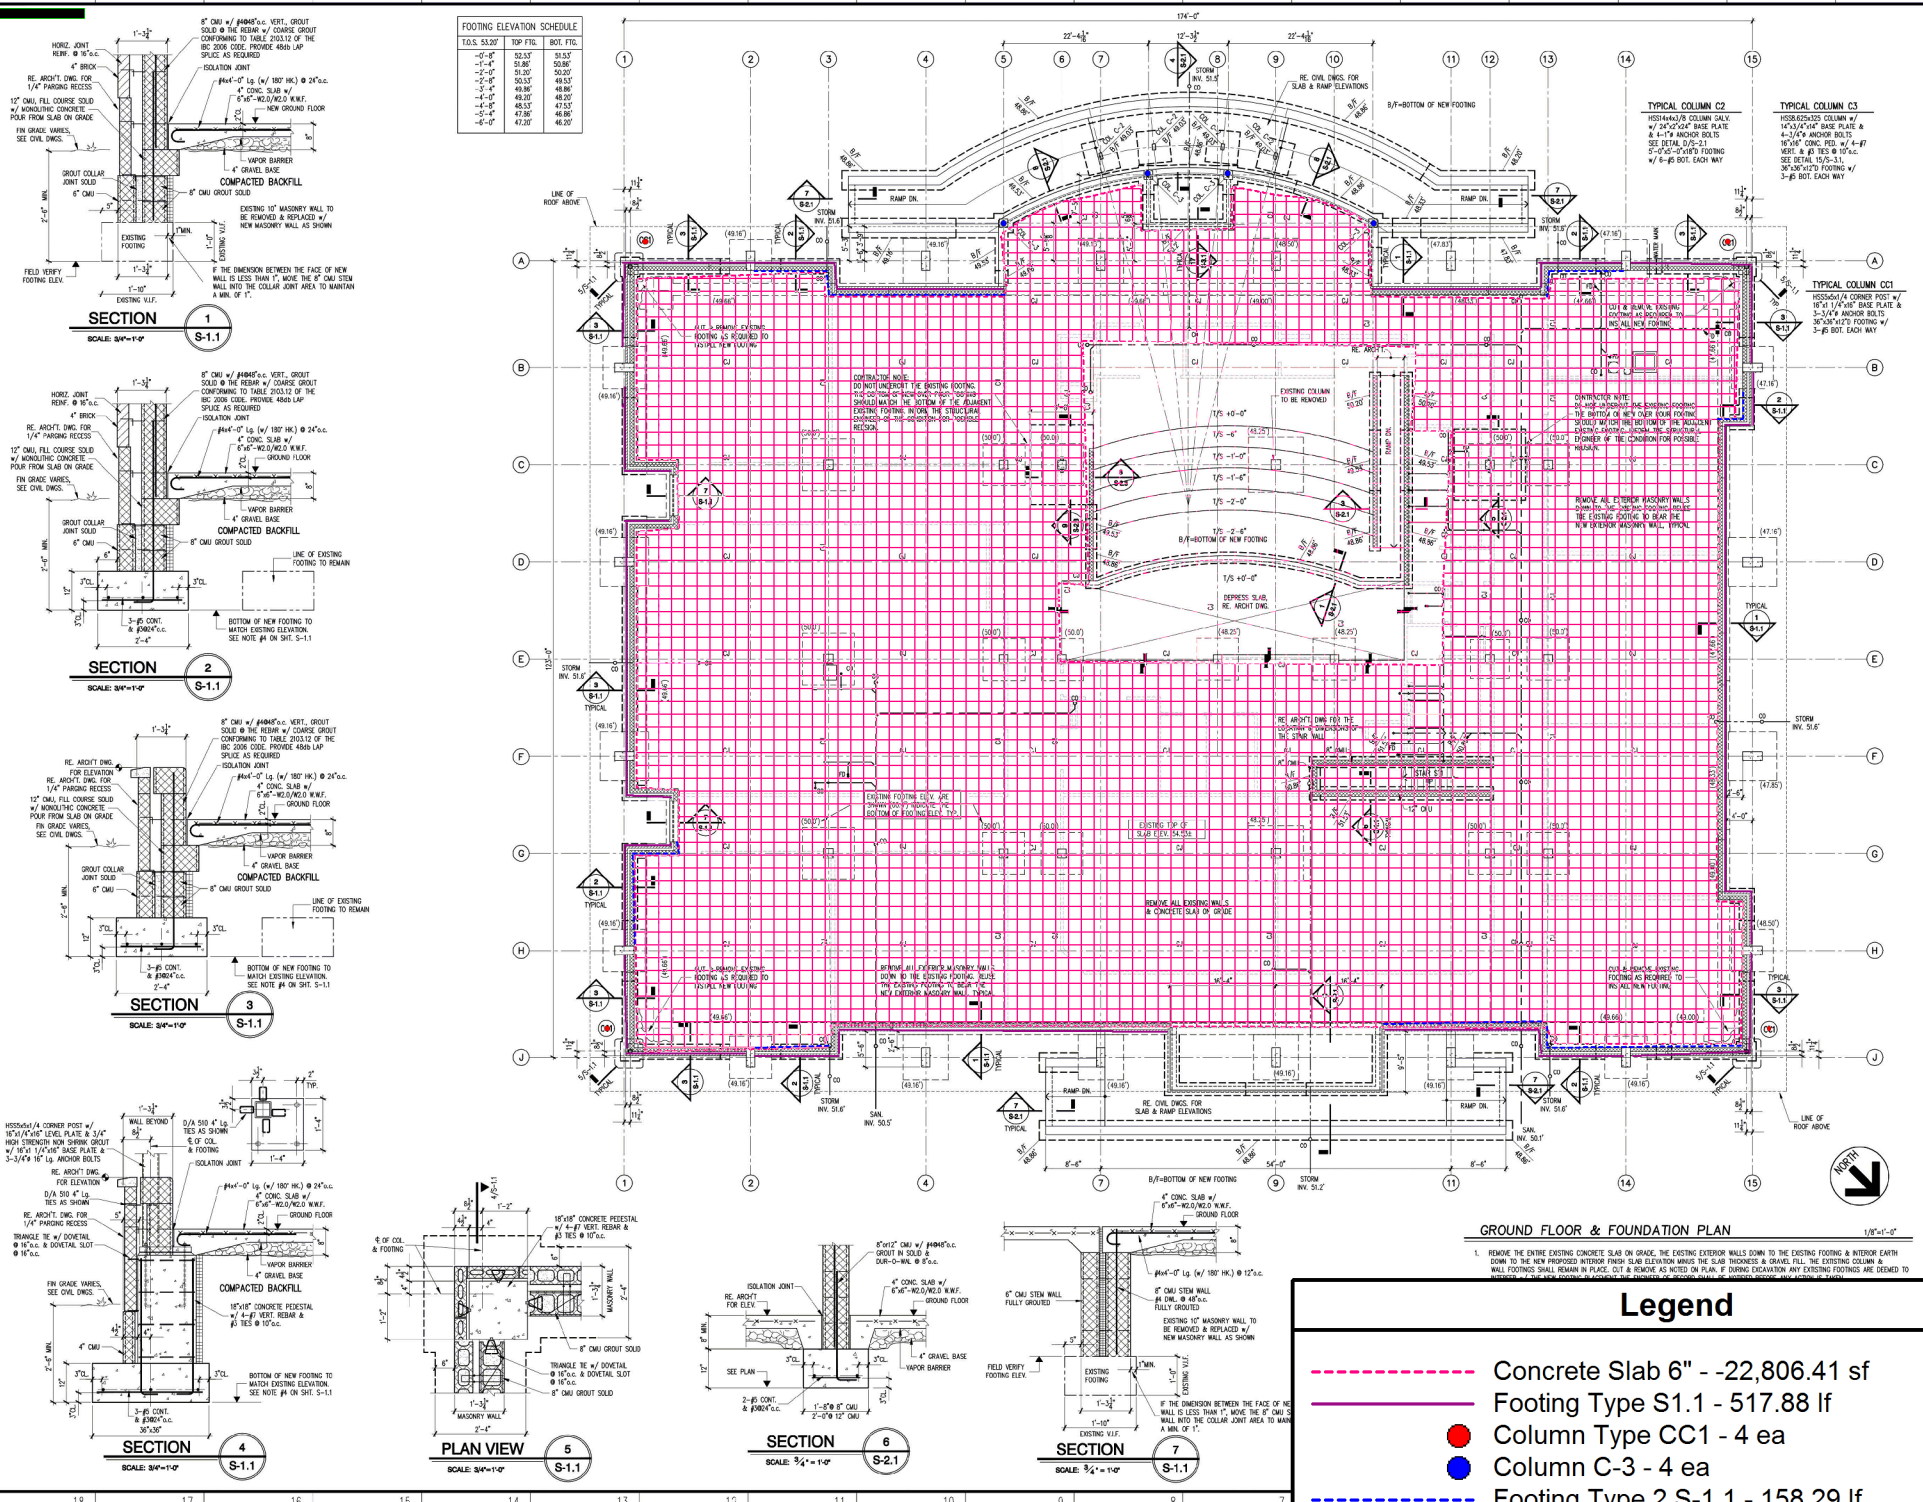

TYPICAL COLUMN C2
 REBAR: 4#4 @ 12" O.C.
 14" x 14" BASE PLATE & 4" x 4" ANCHOR BOLTS
 18" x 18" CONC. PFD. w/ 4-#7 REBAR @ 12" O.C. IN 10'-0" SEE DETAIL 10/5-S-1
 3'-0" x 3'-0" FOOTING w/ 3-#6 BOT. EACH WAY

TYPICAL COLUMN C3
 REBAR: 4#4 @ 12" O.C.
 14" x 14" BASE PLATE & 4" x 4" ANCHOR BOLTS
 18" x 18" CONC. PFD. w/ 4-#7 REBAR @ 12" O.C. IN 10'-0" SEE DETAIL 10/5-S-1
 3'-0" x 3'-0" FOOTING w/ 3-#6 BOT. EACH WAY

TYPICAL COLUMN CC1
 REBAR: 4#4 @ 12" O.C.
 14" x 14" BASE PLATE & 4" x 4" ANCHOR BOLTS
 18" x 18" CONC. PFD. w/ 4-#7 REBAR @ 12" O.C. IN 10'-0" SEE DETAIL 10/5-S-1
 3'-0" x 3'-0" FOOTING w/ 3-#6 BOT. EACH WAY

GROUND FLOOR & FOUNDATION PLAN

1. REMOVE THE ENTIRE EXISTING CONCRETE SLAB ON GRADE, THE EXISTING EXTERIOR WALLS DOWN TO THE EXISTING FOOTING & INTERIOR EARTH DOWN TO THE NEW PROPOSED INTERIOR FINISH SLAB ELEVATION MARKS THE SLAB THICKNESS & GRAVEL FILL, THE EXISTING COLUMN & WALL FOOTINGS SHALL REMAIN IN PLACE. CUT & REMOVE AS NOTED ON PLAN. FURNISH ELEVATION ANY EXISTING FOOTINGS ARE DESIGN TO REMAIN TO THE TOP OF THE EXISTING CONCRETE SLAB ON GRADE.

Legend

- Concrete Slab 6" - 22,806.41 sf
- Footing Type S1.1 - 517.88 lf
- Column Type CC1 - 4 ea
- Column C-3 - 4 ea
- Footing Type 2 S-1.1 - 158.29 lf

COUNTY APPROVAL
 DATE
 PROJECT MANAGER
 DATE
 DEPARTMENT OF GENERAL SERVICES APPROVAL
 DATE
 GP# 20822
 EXISTING & NEW GROUND FLOOR PLAN

This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.